


■ HSE/H1 Linking Device LD 800HSE

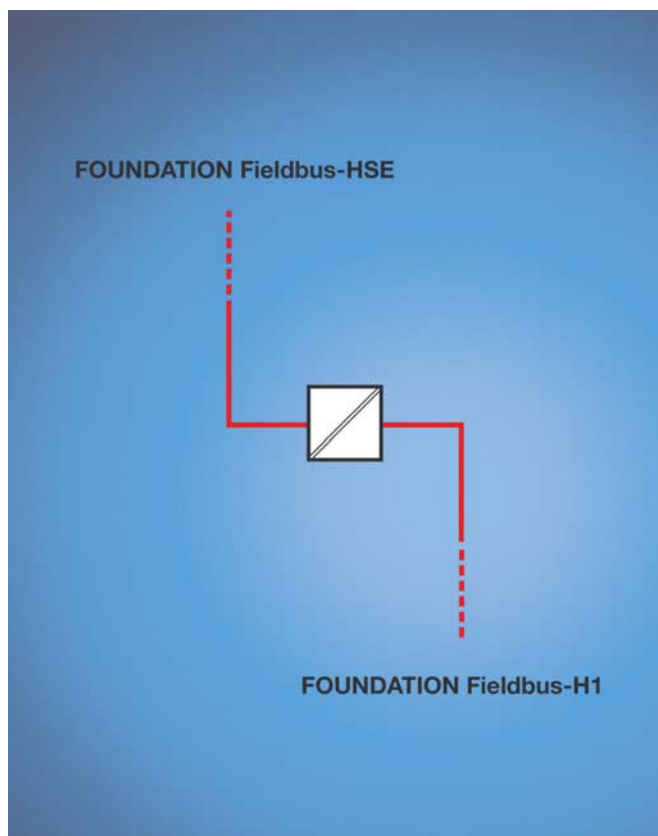

Ordering information

HSE/H1 Linking Device LD 800HSE	Catalog No.		
<p>LD 800HSE The LD 800HSE links the FOUNDATION Fieldbus-HSE protocol to the FF-H1 protocol. For DIN rail mounting, with 4x FF-H1 links (lines) and one FF-HSE connector (line). The LD 800HSE itself needs external 24 VDC power supply. The 4x FF-H1 links (lines) must be powered separately.</p> <p>LD 800HSE is certified to: CE, CSA/UL and Industrial IT enabled</p>	3BDH000320R0101		
<p>Redundancy Link Cable, 0.50 m Redundancy Link Cable links two non-redundant LD 800HSE to one redundant couple.</p>	3BDH000281R1		
<p>Media CD-ROM LD 800HSE, English User Instructions in pdf-format in English</p>	3BDD011678R0101		
<p>User Instruction LD 800HSE, printed English</p>	3BDD011677R0101		

The Industrial^{IT} wordmark and all mentioned product names in the form XXXXX^{IT} are registered or pending trademarks of ABB.

ABB has Sales & Customer Support expertise in over 100 countries worldwide.

www.abb.com/fieldbus

The Company's policy is one of continuous product improvement and the right is reserved to modify the information contained herein without notice.

Printed in the Fed. Rep. of Germany (06.04)

© ABB 2004



ABB Automation Products GmbH

Borsigstr. 2
 63755 Alzenau
 Germany
 Tel: +49 551 905-534
 Fax: +49 551 905-555
 CCC-support.deapr@de.abb.com